



CP.CORE

BENINCA

100%
Made in Italy



APPLICATION

1 actuator of the series BULL5M for sliding gates

CONTROL UNIT POWER SUPPLY


230 Vac

MOTORS POWER SUPPLY

230 Vac 750W

MAIN FUNCTIONS

Parameter and operation logic regulations through trimmers and dip-switches | Integrated 433.92 MHz 64-code radio receiver with 3 encoding systems (Advanced Rolling Code, Rolling Code, Fixed Code) | Removable terminal boards | Automatic, semi-automatic and deadman's logic | Encoder (MAG.E) output for detecting obstacles | Motor limit switch inputs | Step by step, pedestrian and stop inputs | Step by step input configurable as open | Stop input configurable as close or pedestrian | Photocell input programmable as active in opening-closing and in closing phases | Output as gate open indicator | Autosetting of operation and slow-down parameters | Adjustable slow-downs | Electronic torque adjustment for motor on 5 levels | Possibility to manage radio transmitters memorised on integrated receiver with Advantouch system

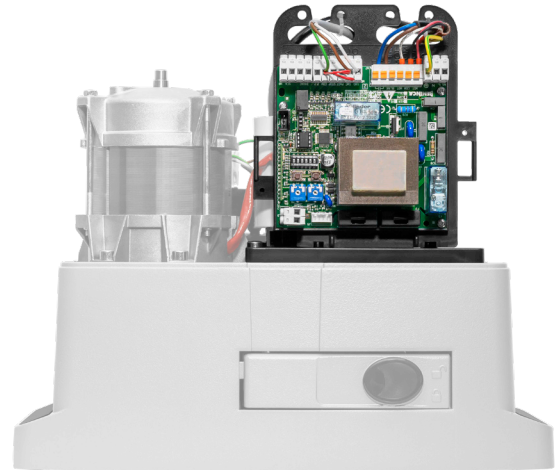

DA.2S

Electronic board that allows synchronised movement of 2 automation devices (opposed sliding gates).



MAG.E

Magnetic sensor device to detect obstacles and manage deceleration.

AUTOMATISMI BENINCA SpA • Via del Capitello, 45 • 36066 Sandrigo (VI) ITALY • T +39 0444 751030 • sales@beninca.com

