



# CP.BISON OTI



**100%**  
Made in Italy



### APPLICATION

1 actuator for sliding gates, series BISON25 OTI, BISON35 OTI and BISON45 OTI

### CONTROL UNIT POWER SUPPLY


230 Vac or 400 Vac

### MOTORS POWER SUPPLY

220 Vac 750W three phase with inverter or 380 Vac 1500W three phase with inverter

### MAIN FUNCTIONS

Integrated LCD display | Integrated 433.92 MHz 64-code radio receiver with 3 encoding systems (Advanced Rolling Code, Rolling Code, Fixed Code) | Removable terminal boards | Automatic, semi-automatic and deadman's logic | Encoder input to detect obstacles | Motor limit switch inputs | Open, close, pedestrian, step by step and stop inputs | Inputs for 4 pairs of photocells (programmable as active in opening-closing and in closing phases) and equipped with PHOTO TEST logic | Input for N.C or 8K2 sensitive edge | Input for safety sensor | Predesigned for inverter connection | Output for gate open indicator | Output configurable for service light, area light or second radio channel | Photocell testing output | Autosetting of operating parameters | Electronic motor torque adjustment | Adjustable slow-down systems | Electronic braking guarantees a precise stop even with heavy doors | Advantouch system to configure parameters and manage radio transmitters | Number of maneuvers | Programming access password | Maintenance warning

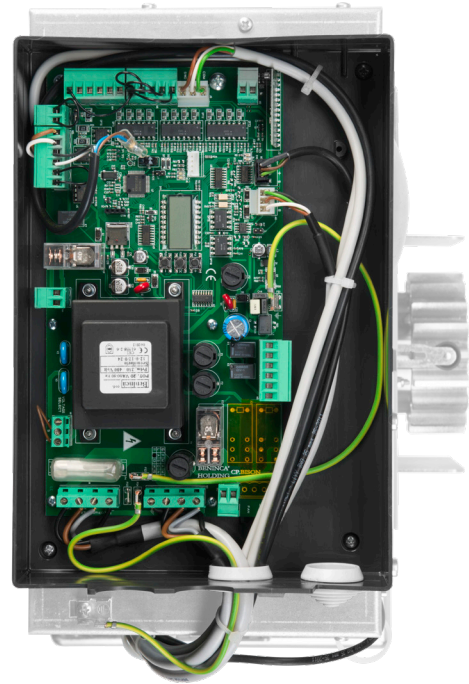

### DA.2S

Electronic board that allows synchronised movement of 2 automation devices (opposed sliding gates).

AUTOMATISMI BENINCA SpA • Via del Capitello, 45 • 36066 Sandrigo (VI) ITALY • T +39 0444 751030 • sales@beninca.com

