



# CP.BULL OMI

**BENINCA**

**100%**  
Made in Italy



**APPLICATION**

1 actuator for sliding gates, series BULL17 OMI

**CONTROL UNIT POWER SUPPLY**


100/250 Vac – 50/60 Hz

**MOTORS POWER SUPPLY**

230 Vac 1000W

**MAIN FUNCTIONS**

Integrated LCD display | ONE2.WI model 433.92 MHz radio receiver provided as standard equipment | Removable terminal boards | Automatic, semi-automatic and deadman's logic | Motor limit switch inputs | Step by step, open, close, pedestrian and stop inputs | no. 2 photocell inputs configurable as active in opening-closing or in closing phases | Input for N.C or 8K2 sensitive edge | Input for safety sensor | Output configurable as gate open indicator, service light, area light | Photocell testing output | Second radio channel output | Autosetting of operating parameters | Electronic torque adjustment with automatic calculation for each point in the stroke (STC SYSTEM) | Anti-crushing safety thanks to amperometric obstacle detection | Adjustable slow-downs | Advantouch system to configure parameters and manage radio transmitters | Integrated inverter | Virtual encoder | Number of maneuvers | Programming access password | Maintenance warning

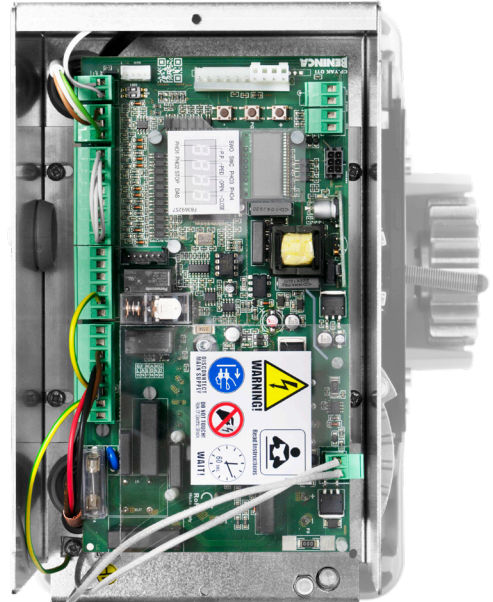

**DA.2S**

Electronic board that allows synchronised movement of 2 automation devices (opposed sliding gates).

**AUTOMATISMI BENINCA SpA** • Via del Capitello, 45 • 36066 Sandrigo (VI) ITALY • T +39 0444 751030 • sales@beninca.com

